

EYE PROTECTION

- Machine Type - Variable machines
 - Type of attachment - On/off magnet
 - Manually adjusted
 - Construction - 3 mm Polycarbonate vizor
 - Operation - Eye protection
- **Models 01 and 05** have a flat screen with top curvature and are attached to a on/off magnet by a flexible stem which enables the screen to be rapidly positioned at any angle.
 - **Models 00-1 and 03** have the same type of screen and are attached to a powerful on/off magnet by a rigid arm with precision ball and socket mounting assembly enabling the screen to be positively adjusted and locked in any position.



Ball Joint




Flexible



MODEL - OPTIGUARD 01, 03, 05 & 00-1

MODEL - GRINDING SGB, ST & ST/1

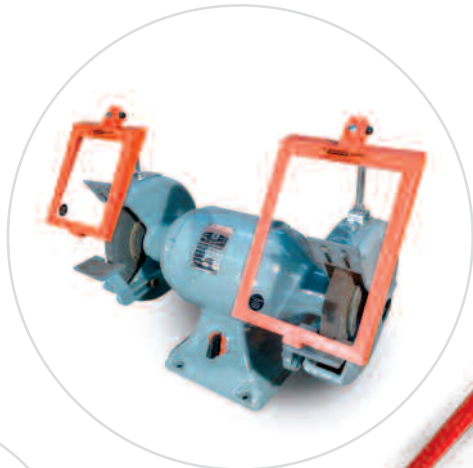

ST



ST/1

MAGNETIC OPTIGUARDS

Complete Guards

Part No.	Model	Screen Size	Type of Stem
110001	01	245 x 180mm	Flexible
110009	05	295 x 280mm	Flexible
110005	00-1	245 x 180mm	Ball Joint
110003	03	295 x 280mm	Ball Joint

Spare Screens only

Part No.	To Suit	Size mm
110002	01	245 x 180mm
110010	05	295 x 280mm
110006	00-1	245 x 180mm
110004	03	295 x 280mm

GRINDING MACHINE GUARDS

Complete Guards

Part No.	Model No.	Wheel Size	Frame Size
130003	SGB	200	159 x 133 mm
130005	ST	275	215 x 160 mm
130007	ST/1	300	324 x 305 mm

Spare Visors

Part No.	Model No.	Visor Size mm
130004	SGB	150 x 125 mm
130006	ST	203 x 153 mm
130008	ST/1	295 x 295 mm

- Machine Type - Wheel size dependant
- Method of attachment - Secures to existing wheel guard
- Manually adjusted by pinch bolt
- Operation - Eye protection
- **Construction -**
ST/SGB Moulded nylon frame 5mm polycarbonate vizor
ST/1 Cast aluminium frame 5 mm polycarbonate vizor